

FORM PTO-1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER ICB0099
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <b>09/763691</b>
INTERNATIONAL APPLICATION NO. PCT/CH99/00387	INTERNATIONAL FILING DATE 24 August 1999	PRIORITY DATE CLAIMED 28 August 1998	
TITLE OF INVENTION ELECTRONIC TIMEPIECE INCLUDING A TIME RELATED DATA ITEM BASED ON A DECIMAL SYSTEM			
APPLICANT(S) FOR DO/EO/US MULLER, Jacques; DERIVAZ, Pascal; and MARQUIS, Roger			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</li> <li>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input checked="" type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>			
Items 11 to 20 below concern document(s) or information included:			
<ol style="list-style-type: none"> <li>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li> <li>14. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>15. <input type="checkbox"/> A substitute specification.</li> <li>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li> <li>18. <input checked="" type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</li> <li>19. <input checked="" type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li> <li>20. <input checked="" type="checkbox"/> Other items or information: <ol style="list-style-type: none"> <li>(A) Formal Drawings - Six (6) Sheets containing Figs 1-2, 3a-b, 4, 5, 5a-c, 6 and 6a;</li> <li>(B) Copy of Form PCT/IB/308;</li> <li>(C) Copy of International Search Report, including Annex (Form PCT/ISA/210 - 3 pp.);</li> <li>(D) Copy of International Preliminary Examination Report &amp; verified translation of amendments, and</li> <li>(E) Application Data Sheet (2 pp.).</li> </ol> </li> </ol>			

U.S. APPLICATION NO. **09/763691**INTERNATIONAL APPLICATION NO  
PCT/CH99/00387ATTORNEY'S DOCKET NUMBER  
ICB009921. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO. .... **\$1000.00**International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO ..... **\$860.00**International preliminary examination fee (37 CFR 1.482) not paid to USPTO  
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... **\$710.00**International preliminary examination fee (37 CFR 1.482) paid to USPTO  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... **\$690.00**International preliminary examination fee (37 CFR 1.482) paid to USPTO  
and all claims satisfied provisions of PCT Article 33(1)-(4) ..... **\$100.00****ENTER APPROPRIATE BASIC FEE AMOUNT =****CALCULATIONS PTO USE ONLY**

\$ 860.00\*\*

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	16 - 20 =	0	x \$18.00	\$ -0- **
Independent claims	1 - 3 =	0	x \$80.00	\$ -0- **
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$ -0- **

**TOTAL OF ABOVE CALCULATIONS =**

\$ 860.00\*\*

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above  
are reduced by 1/2.

\$

**SUBTOTAL =**

\$ 860.00\*\*

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

**TOTAL NATIONAL FEE =**

\$ 860.00\*\*

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). **\$40.00** per property +

\$

40.00

**TOTAL FEES ENCLOSED =**

\$ 900.00\*\*

**\*\* Filing Fees calculated after entry of the Preliminary Amendment  
filed herewith which deletes multiple dependencies in the claims.**Amount to be  
refunded:

\$

charged:

\$

- a. ☒ A check in the amount of \$ 900.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 501281. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card  
information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR  
1.137 (a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO

GRIFFIN & SZIPL, P.C.  
Suite PH-1, 2300 Ninth Street, South  
Arlington, VA 22204-2320  
Telephone: (703) 979-5700  
Facsimile: (703) 979-7429  
Customer No.: 24203

Date: 26 February, 2001

SIGNATURE

B. Franklin Griffin, Jr.

NAME

19,334

REGISTRATION NUMBER

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: )  
 ) Atty. Docket: ICB0099  
 Jacques MÜLLER et al. )  
 )  
 Serial No.: \_\_\_\_\_ (corresponding )  
 To PCT/CH99/00387 filed 24 August )  
 1999) )  
 )  
 Filed: Herewith )  
 )  
 For: ELECTRONIC TIMEPIECE )  
 INCLUDING A TIME RELATED )  
 DATA ITEM BASED ON A )  
 DECIMAL SYSTEM )

**PRELIMINARY AMENDMENT****BOX: PATENT APPLICATION**

Assistant Commissioner for Patents  
 Washington, D. C. 20231

Sir:

Prior to calculating the filing fee, please amend the above-captioned application as follows:

**IN THE SPECIFICATION:**

Page 1, between lines 13 and 14, insert the following new paragraph:

-- US Patent No. 4 926 400 describes an electronic timepiece in accordance with the preamble part of independent claim 1. This timepiece allows the display of a first time related data item based on the H-M-S system and of a second time related data item based on a non-decimal system in which time is divided into twenty-five 25ths of a day. In accordance with table 1, column 3, of this document, one day (24 hours) is divided into 25 "hours" of 60 "minutes" each, each "minute" including 57.6 seconds. Every "minute", 2.4 seconds are thus "saved" so as to form an additional simulated hour. The display modes of the "24h" and "25h" time related data items are identical. Without any complementary indications, the user of such a timepiece will not be able to clearly differentiate between these two time related data items. --

Page 1, line 18 through Page 2, line 1, delete that paragraph in its entirety and replace it with the following new paragraph:

-- The present invention therefore concerns an electronic timepiece allowing the display of at least a first and a second time related data item the features of which are recited in independent claim 1. --

Page 2, between lines 24 and 25, insert the following new paragraph:

-- It is to be pointed out that patent application GB-A-2 274 004 and the article "Time and Its Units" of Mr. T. Raja Rao, "JOURNAL OF THE INSTITUTION OF ENGINEERS (INDIA) INDUSTRIAL DEVELOPMENT AND GENERAL ENGINEERING", vol. 54, September 1973, pages 25-28, (XP-002101432), both describe the use of a decimal system as an alternative to the conventional H-M-S system as well as a timepiece allowing a single time indication data item based on such a decimal system to be displayed. --

Page 4, between lines 2 and 3, insert the following new paragraph:

-- Means for generating clock pulses which might be used within the scope of the present invention are for example disclosed in documents US-A-3 975 898, US-A-5 771 180, US-A-3 777 471 and US-A-3 284 715. --

#### **IN THE CLAIMS:**

Please cancel all of the claims pending in this application without prejudice, i.e., claims 1-16, and substitute therefore the following new claims:

-- 17. An electronic timepiece allowing the display of at least a first and a second time related data item, said first time related data item being based on the Hour-Minute-Second system, this timepiece including a time base supplying pulses to a frequency divider circuit including N binary division stages and supplying first control pulses allowing said first time related data item to be formed and displayed, this timepiece further including generating means arranged to supply, from auxiliary control pulses originating from said time base, second control pulses allowing said second time related data item to be formed and displayed,

wherein said second time related data item is based on a decimal system in which the time is divided at least into thousandths of a day and wherein said second

time related data item is displayed with three digits so that it cannot be confused with said first time related data item.

18. The electronic timepiece according to claim 17, wherein said generating means are arranged to count successively the auxiliary control pulses in accordance with a counting sequence formed of counting operations of  $n$  and  $n+1$  auxiliary control pulses succeeding each other in accordance with a determined order so that said generating means supply the second control pulses at a mean frequency allowing said second time related data item based on the decimal system to be formed,  $n$  being an integer number directly less than the division ratio of the frequency of said auxiliary control pulses by the frequency of said second control pulses.

19. The electronic timepiece according to claim 18, wherein said counting operations of  $n$  and  $n+1$  auxiliary control pulses follow each other in accordance with an order determined so that the second control pulses are supplied with minimum time error.

20. The electronic timepiece according to claim 18, wherein said counting sequence is comprised in a table including as many entries as there are counting operations.

21. The electronic timepiece according to claim 20, wherein said table is formed of a binary word in which the binary value  $\ll 0 \gg$  indicates that  $n$  auxiliary control pulses must be counted and the binary value  $\ll 1 \gg$  indicates that  $n+1$  auxiliary control pulses must be counted.

22. The electronic timepiece according to claim 20, wherein the entries of said table are indexed by means of a register containing a value of said second time related data item.

23. The electronic timepiece according to claim 18, wherein said counting operations of  $n$  or  $n+1$  auxiliary control pulses are determined by means of a register containing a value of said second time related data item.

24. The electronic timepiece according to claim 17, wherein said generating means include a primary counter arranged for counting  $n$  auxiliary control pulses, and inhibition means for said primary counter arranged for periodically inhibiting  $k$  auxiliary control pulses upstream of said primary counter, so that the latter supplies the second control pulses at a mean frequency allowing said second time related data item based on the decimal system to be formed,  $n$  being an integer number directly less than the division ratio of the frequency of said auxiliary control pulses by the frequency of said second control pulses.

25. The electronic timepiece according to claim 24, wherein said inhibition means include a secondary counter arranged for counting  $m$  auxiliary control pulses, a logic detection circuit coupled to said secondary counter so as to detect  $k$  intermediate states thereof, and an AND logic gate including two inputs, one being inverted and connected to an output of said logic detection circuit and the other receiving said auxiliary control pulses, said logic detection circuit sending an inhibition signal blocking the AND logic gate when one of the  $k$  intermediate states is detected, so that one auxiliary control pulse is inhibited upstream of said primary counter.

26. The electronic timepiece according to claim 25, wherein said  $k$  intermediate states are selected so as to be equidistant from each other.

27. The electronic timepiece according to claim 17, wherein said generating means include a primary counter arranged for counting  $n+1$  auxiliary control pulses, and initialization means coupled to said primary counter and arranged for periodically initializing said primary counter with a value  $k$  corresponding to a complementary number of auxiliary control pulses so that said primary counter supplies the second control pulses at a mean frequency allowing said second time related data item based

on the decimal system to be formed,  $n+1$  being an integer number directly greater than the division ratio of the frequency of said auxiliary control pulses by the frequency of said second control pulses.

28. The electronic timepiece according to claim 27, wherein said initialization means include a secondary counter arranged for counting  $m$  second control pulses and an initialization circuit coupled to said primary counter, said secondary counter providing a signal to said initialization circuit every  $m$  second control pulses so that said primary counter is initialized with a value  $k$ .

29. The electronic timepiece according to claim 17, wherein said auxiliary control pulses are supplied at an output of one of the binary division stages of said frequency divider circuit.

30. The electronic timepiece according to claim 17, wherein said auxiliary control pulses are supplied at an output of  $N^*$  additional binary division stages connected after said frequency divider circuit upstream of said generating means.

31. The electronic timepiece according to claim 17, wherein said generating means supply said second control pulses at a mean frequency of  $1/8.64$  Hz.

32. The electronic timepiece according to claim 17, wherein said generating means supply said second control pulses at a mean frequency of  $1/86.4$  Hz. --

### **REMARKS**

With the above amendments, the specification has been amended to include additional background art known to the applicants.

All of the claims originally pending in this application, i.e., claims 1-16, have been cancelled and replaced by new claims 17-32.

Attached hereto are substitute pages 1-4a of the specification and substitute pages 20-23 of the claims. These substitute pages replace pages 1-4 of the original


specification and pages 20-23 containing the claims as originally filed. As can be seen by the marked-up copies of original pages 1-4, no new matter has been added.

In view of the above, it is believed that the application is in good formal condition for examination.

Respectfully submitted,

GRIFFIN & SZIPL, PC

Date: 02-21-01

  
B. Franklin Griffin, Jr.  
Reg. No. 19,334

GRIFFIN & SZIPL, PC  
Suite PH-1  
2300 Ninth Street, South  
Arlington, VA 22204

Telephone: (703) 979-5700  
Facsimile: (703) 979-7429  
Customer No.: 24203



ELECTRONIC TIMEPIECE INCLUDING A TIME  
RELATED DATA ITEM BASED ON A DECIMAL SYSTEM

The present invention relates to an electronic timepiece allowing the display of several time related data. More particularly, the present invention relates to a timepiece allowing the display of at least a first and a second time related data item, the first time related data item being based on the Hour-Minute-Second system

5 (hereinafter H-M-S).

Electronic timepieces allowing the display of a plurality of time related data are already known in the prior art. These timepieces, commonly called « universal timepieces » are typically provided to allow the display of a time related data item representative of a universal time and one or more time related data representative of  
10 local times corresponding to different time zones. This multitude of time related data can cause a risk of confusion for the user when they are read and generally requires means to be provided to allow clear identification of what each of the displayed time data refers to.

US Patent No. 4 926 400 describes an electronic timepiece in accordance with  
15 the preamble part of independent claim 1. This timepiece allows the display of a first time related data item based on the H-M-S system and of a second time related data item based on a non-decimal system in which time is divided into twenty-five 25ths of a day. In accordance with table 1, column 3, of this document, one day (24 hours) is divided into 25 "hours" of 60 "minutes" each, each "minute" including 57.6 seconds.  
20 Every "minute", 2.4 seconds are thus "saved" so as to form an additional simulated hour. The display modes of the "24h" and "25h" time related data items are identical. Without any complementary indications, the user of such a timepiece will not be able to clearly differentiate between these two time related data items.

One object of the present invention is thus to provide an electronic timepiece  
25 allowing the display of at least a first and a second time related data item, by means of which the user can clearly and quickly identify and differentiate between the displayed time related data.

The present invention therefore concerns an electronic timepiece allowing the display of at least a first and a second time related data item the features of which are recited in independent claim 1.

The solution advocated by the present invention thus allow the first time related  
5 data item to be clearly differentiated from the second due to the fact that the first and second time related data items are based on different systems.

The H-M-S system conventionally used consists of dividing the day into 24 hours, 1 hour being divided into 60 minutes, and 1 minute into 60 seconds. A time division based on the decimal system on the other hand consists in dividing the day,  
10 not in accordance with the aforementioned conventional scheme, but successively, into tenths of a day (equivalent to 2.4 hours or 144 minutes), which are themselves divided into hundredths of a day (equivalent to 14.4 minutes or 864 seconds), then into thousandths of a day (equivalent to 86.4 seconds) etc..

In particular, by selecting a division of time into thousandths of a day, the  
15 second time related data item only requires three digits (« 000 » to « 999 ») to be displayed and is thus clearly distinguished from a conventional time related data item based on the H-M-S system typically displayed in the format « HH:MM ». The risk of confusion during reading of the time related data is thus greatly reduced.

The atypical format of the second time related data item proves for example  
20 particularly suitable for displaying a universal time to which the user can clearly refer without confusing it with a conventional time related data item relating to the time zone in which he is situated.

The decimal system further constitutes an advantageous alternative to the H-M-S system conventionally used since it allows the inherent conversion problems of  
25 the H-M-S system to be avoided. This alternative is moreover more logical and comprehensible for the user who is already accustomed to the decimal system.

It is to be pointed out that patent application GB-A-2 274 004 and the article "Time and Its Units" of Mr. T. Raja Rao, "JOURNAL OF THE INSTITUTION OF ENGINEERS (INDIA) INDUSTRIAL DEVELOPMENT AND GENERAL  
30 ENGINEERING", vol. 54, September 1973, pages 25-28, (XP-002101432), both describe the use of a decimal system as an alternative to the conventional H-M-S

system as well as a timepiece allowing a single time indication data item based on such a decimal system to be displayed.

In order to form a time related data item based on the H-M-S system,  
electronic timepieces commonly include a time base, typically a quartz oscillator  
5 supplying pulses at a determined frequency equivalent to a binary power, for example  
32,768 Hz. A frequency divider circuit, formed of a succession of N binary division  
stages (flip-flops) connected in cascade, is coupled to the time base so as to supply  
control pulses whose frequency is reduced by a factor  $2^N$ . Typically, this frequency  
divider circuit is formed of N=15 binary division stages, so that the frequency of the  
10 pulses supplied by the time base is reduced to 1 Hz. In electronic timepieces allowing  
the display of several distinct time related data, these control pulses are thus used to  
control the respective displays of these time related data.

In order to form the second time related data item based on the selected  
decimal system, it is a priori possible to periodically perform an arithmetical conversion  
15 operation on a conventional time related data item based on the H-M-S system. This  
trivial solution consists, in other words, in providing conversion or calculating means  
dedicated to this task. It will be noted however that this solution is not suitable for use  
in a timepiece since it will preferably be sought to provide means allowing control  
pulses, which allow the second time related data item based on the decimal system to  
20 be formed and displayed, to be generated directly.

In order to generate control pulses allowing a time related data item based on  
the decimal system to be formed in which the time is divided at least into thousandths  
of a day, it is necessary to generate such pulses at least at a frequency of 1/86.4 Hz  
or a decimal multiple of this frequency, i.e. 1/8.64 Hz for a division into ten-  
25 thousandths of a day, 1/0.864 Hz for a division into a hundred-thousandths of a day,

etc.. In practice, one will choose to generate the second control pulses either at a frequency of 1/86.4 Hz or at a frequency of 1/8.64 Hz, higher frequencies being however able to be chosen as required.

A trivial solution to this problem consists in providing an additional time base  
5 allowing pulses to be supplied at a specific frequency corresponding to a multiple of the desired frequency, for example 10,000 Hz. A frequency divider circuit having for example a division ratio equivalent to 86,400 would thus allow control pulses to be generated at a frequency of 1/8.64 Hz. This trivial solution thus involves the use of two distinct division chains (time base + frequency divider circuit) to display the first and  
10 second time related data items. It will however be sought to limit the number of components necessary to generate the control pulses and in particular to use only one time base, and preferably a horological time base, i.e. a time base supplying pulses at a frequency equivalent to a binary power.

Means for generating clock pulses which might be used within the scope of the  
15 present invention are for example disclosed in documents US-A-3 975 898, US-A-5 771 180, US-A-3 777 471 and US-A-3 284 715.

According to the present invention, the timepiece is advantageously arranged to derive the control pulses of the first and second time related data items from the same time base. It includes for this purpose generating means arranged to supply,  
20 from auxiliary control pulses originating from the time base, the second control pulses allowing the second time related data item to be formed and displayed. The timepiece can thus be arranged in particular to derive, from pulses at 1 Hz originating from the time base at the output of the frequency divider circuit, second control pulses having a frequency of 1/86.4 Hz in order to form a second time related data item to a  
25 thousandth of a day, despite the fact that the division ratio of these frequencies is not integer.

Another advantage of the present invention thus lies in the fact that only one time base is used to generate the different control pulses of the first and second time related data items and that it is consequently possible to adapt the electronic system

of a conventional timepiece so that it allows the display of a time related data item based on the decimal system.

Other features and advantages of the present invention will appear upon reading the following detailed description, made with reference to the annexed

5 drawings given solely by way of example and in which:

- Figure 1 shows a simplified block diagram of a timepiece constituting a first embodiment of the present invention;

- Figure 2 shows a simplified block diagram of a timepiece constituting a second embodiment of the present invention;

10 - Figures 3a and 3b show plane view of timepieces according to the present invention illustrating different possibilities for the display of the time related data;

- Figure 4 shows a flow chart of the implementation of a first alternative embodiment of the generating means allowing control pulses to be supplied for the display of the time related data item based on the decimal system;

15 - Figure 5 shows a second alternative embodiment of the generating means allowing control pulses to be supplied for the display of the time related data item based on the decimal system;

WHAT IS CLAIMED IS

17. An electronic timepiece allowing the display of at least a first and a second time related data item, said first time related data item being based on the Hour-Minute-Second system, this timepiece including a time base supplying pulses to a frequency divider circuit including N binary division stages and supplying first control  
5 pulses allowing said first time related data item to be formed and displayed, this timepiece further including generating means arranged to supply, from auxiliary control pulses originating from said time base, second control pulses allowing said second time related data item to be formed and displayed,

wherein said second time related data item is based on a decimal system in  
10 which the time is divided at least into thousandths of a day and wherein said second time related data item is displayed with three digits so that it cannot be confused with said first time related data item.

18. The electronic timepiece according to claim 17, wherein said generating means are arranged to count successively the auxiliary control pulses in accordance with a counting sequence formed of counting operations of n and n+1 auxiliary control pulses succeeding each other in accordance with a determined order so that said  
5 generating means supply the second control pulses at a mean frequency allowing said second time related data item based on the decimal system to be formed, n being an integer number directly less than the division ratio of the frequency of said auxiliary control pulses by the frequency of said second control pulses.

19. The electronic timepiece according to claim 18, wherein said counting operations of n and n+1 auxiliary control pulses follow each other in accordance with an order determined so that the second control pulses are supplied with minimum time error.

20. The electronic timepiece according to claim 18, wherein said counting sequence is comprised in a table including as many entries as there are counting operations.

21. The electronic timepiece according to claim 20, wherein said table is formed of a binary word in which the binary value  $\ll 0 \gg$  indicates that n auxiliary control pulses must be counted and the binary value  $\ll 1 \gg$  indicates that n+1 auxiliary control pulses must be counted.

22. The electronic timepiece according to claim 20, wherein the entries of said table are indexed by means of a register containing a value of said second time related data item.

23. The electronic timepiece according to claim 18, wherein said counting operations of n or n+1 auxiliary control pulses are determined by means of a register containing a value of said second time related data item.

24. The electronic timepiece according to claim 17, wherein said generating means include a primary counter arranged for counting n auxiliary control pulses, and inhibition means for said primary counter arranged for periodically inhibiting k auxiliary control pulses upstream of said primary counter, so that the latter supplies the  
5 second control pulses at a mean frequency allowing said second time related data item based on the decimal system to be formed, n being an integer number directly less than the division ratio of the frequency of said auxiliary control pulses by the frequency of said second control pulses.

25. The electronic timepiece according to claim 24, wherein said inhibition means include a secondary counter arranged for counting m auxiliary control pulses, a logic detection circuit coupled to said secondary counter so as to detect k intermediate states thereof, and an AND logic gate including two inputs, one being inverted and  
5 connected to an output of said logic detection circuit and the other receiving said auxiliary control pulses, said logic detection circuit sending an inhibition signal blocking the AND logic gate when one of the k intermediate states is detected, so that one auxiliary control pulse is inhibited upstream of said primary counter.

26. The electronic timepiece according to claim 25, wherein said k intermediate states are selected so as to be equidistant from each other.

27. The electronic timepiece according to claim 17, wherein said generating means include a primary counter arranged for counting  $n+1$  auxiliary control pulses, and initialization means coupled to said primary counter and arranged for periodically initializing said primary counter with a value k corresponding to a complementary  
5 number of auxiliary control pulses so that said primary counter supplies the second control pulses at a mean frequency allowing said second time related data item based on the decimal system to be formed,  $n+1$  being an integer number directly greater than the division ratio of the frequency of said auxiliary control pulses by the frequency of said second control pulses.

28. The electronic timepiece according to claim 27, wherein said initialization means include a secondary counter arranged for counting m second control pulses and an initialization circuit coupled to said primary counter, said secondary counter providing a signal to said initialization circuit every m second  
5 control pulses so that said primary counter is initialized with a value k.

29. The electronic timepiece according to claim 17, wherein said auxiliary control pulses are supplied at an output of one of the binary division stages of said frequency divider circuit.

30. The electronic timepiece according to claim 17, wherein said auxiliary control pulses are supplied at an output of  $N^*$  additional binary division stages connected after said frequency divider circuit upstream of said generating means.



31. The electronic timepiece according to claim 17, wherein said generating means supply said second control pulses at a mean frequency of 1/8.64 Hz.

32. The electronic timepiece according to claim 17, wherein said generating means supply said second control pulses at a mean frequency of 1/86.4 Hz.

ELECTRONIC TIMEPIECE INCLUDING A TIME  
RELATED DATA ITEM BASED ON A DECIMAL SYSTEM

The present invention relates to an electronic timepiece allowing the display of several time related data. More particularly, the present invention relates to a timepiece allowing the display of at least a first and a second time related data item, the first time related data item being based on the Hour-Minute-Second system

5 (hereinafter H-M-S).

Electronic timepieces allowing the display of a plurality of time related data are already known in the prior art. These timepieces, commonly called « universal timepieces » are typically provided to allow the display of a time related data item representative of a universal time and one or more time related data representative of

10 local times corresponding to different time zones. This multitude of time related data can cause a risk of confusion for the user when they are read and generally requires means to be provided to allow clear identification of what each of the displayed time data refers to.

US Patent No. 4 926 400 describes an electronic timepiece in accordance with

15 the preamble part of independent claims 1, 7 and 10. This timepiece allows the display of a first time related data item based on the H-M-S system and of a second time related data item based on a non-decimal system in which time is divided into twenty-five 25ths of a day. In accordance with table 1, column 3, of this document, one day (24 hours) is divided into 25 "hours" of 60 "minutes" each, each "minute"

20 including 57.6 seconds. Every "minute", 2.4 seconds are thus "saved" so as to form an additional simulated hour. The display modes of the "24h" and "25h" time related data items are identical. Without any complementary indications, the user of such a timepiece will not be able to clearly differentiate between these two time related data items.

25 One object of the present invention is thus to provide an electronic timepiece allowing the display of at least a first and a second time related data item, by means of which the user can clearly and quickly identify and differentiate between the displayed time related data.

The present invention therefore concerns electronic timepieces allowing the display of at least a first and a second time related data item the features of which are recited in independent claims 1, 7 and 10.

5 The various solutions advocated by the present invention thus allow the first time related data item to be clearly differentiated from the second due to the fact that the first and second time related data items are based on different systems.

10 The H-M-S system conventionally used consists of dividing the day into 24 hours, 1 hour being divided into 60 minutes, and 1 minute into 60 seconds. A time division based on the decimal system on the other hand consists in dividing the day, not in accordance with the aforementioned conventional scheme, but successively, into tenths of a day (equivalent to 2.4 hours or 144 minutes), which are themselves divided into hundredths of a day (equivalent to 14.4 minutes or 864 seconds), then into thousandths of a day (equivalent to 86.4 seconds) etc..

15 In particular, by selecting a division of time into thousandths of a day, the second time related data item only requires three digits (« 000 » to « 999 ») to be displayed and is thus clearly distinguished from a conventional time related data item based on the H-M-S system typically displayed in the format « HH:MM ». The risk of confusion during reading of the time related data is thus greatly reduced.

20 The atypical format of the second time related data item proves for example particularly suitable for displaying a universal time to which the user can clearly refer without confusing it with a conventional time related data item relating to the time zone in which he is situated.

25 The decimal system further constitutes an advantageous alternative to the H-M-S system conventionally used since it allows the inherent conversion problems of the H-M-S system to be avoided. This alternative is moreover more logical and comprehensible for the user who is already accustomed to the decimal system.

30 It is to be pointed out that patent application GB-A-2 274 004 and the article "Time and Its Units" of Mr. T. Raja Rao, "JOURNAL OF THE INSTITUTION OF ENGINEERS (INDIA) INDUSTRIAL DEVELOPMENT AND GENERAL ENGINEERING", vol. 54, September 1973, pages 25-28, (XP-002101432), both describe the use of a decimal system as an alternative to the conventional H-M-S

system as well as a timepiece allowing a single time indication data item based on such a decimal system to be displayed.

Prior document WO 99/38053 (which is applicable for the question of novelty only) shows a timepiece allowing the display of a first time related data item based on the H-M-S system and of a second time related data item based on a decimal system. This document is however silent about the specific technical realisation of the generating means of the control pulses of the second time related data item.

In order to form a time related data item based on the H-M-S system, electronic timepieces commonly include a time base, typically a quartz oscillator supplying pulses at a determined frequency equivalent to a binary power, for example 32,768 Hz. A frequency divider circuit, formed of a succession of N binary division stages (flip-flops) connected in cascade, is coupled to the time base so as to supply control pulses whose frequency is reduced by a factor  $2^N$ . Typically, this frequency divider circuit is formed of N=15 binary division stages, so that the frequency of the pulses supplied by the time base is reduced to 1 Hz. In electronic timepieces allowing the display of several distinct time related data, these control pulses are thus used to control the respective displays of these time related data.

In order to form the second time related data item based on the selected decimal system, it is a priori possible to periodically perform an arithmetical conversion operation on a conventional time related data item based on the H-M-S system. This trivial solution consists, in other words, in providing conversion or calculating means dedicated to this task. It will be noted however that this solution is not suitable for use in a timepiece since it will preferably be sought to provide means allowing control pulses, which allow the second time related data item based on the decimal system to be formed and displayed, to be generated directly.

In order to generate control pulses allowing a time related data item based on the decimal system to be formed in which the time is divided at least into thousandths of a day, it is necessary to generate such pulses at least at a frequency of 1/86.4 Hz or a decimal multiple of this frequency, i.e. 1/8.64 Hz for a division into ten-thousandths of a day, 1/0.864 Hz for a division into a hundred-thousandths of a day,

etc.. In practice, one will choose to generate the second control pulses either at a frequency of 1/86.4 Hz or at a frequency of 1/8.64 Hz, higher frequencies being however able to be chosen as required.

A trivial solution to this problem consists in providing an additional time base  
5 allowing pulses to be supplied at a specific frequency corresponding to a multiple of the desired frequency, for example 10,000 Hz. A frequency divider circuit having for example a division ratio equivalent to 86,400 would thus allow control pulses to be generated at a frequency of 1/8.64 Hz. This trivial solution thus involves the use of two distinct division chains (time base + frequency divider circuit) to display the first and  
10 second time related data items. It will however be sought to limit the number of components necessary to generate the control pulses and in particular to use only one time base, and preferably a horological time base, i.e. a time base supplying pulses at a frequency equivalent to a binary power.

Means for generating clock pulses which might be used within the scope of the  
15 present invention are for example disclosed in documents US-A-3 975 898, US-A-5 771 180, US-A-3 777 471 and US-A-3 284 715.

According to the present invention, the timepiece is advantageously arranged to derive the control pulses of the first and second time related data items from the same time base. It includes for this purpose generating means arranged to supply,  
20 from auxiliary control pulses originating from the time base, the second control pulses allowing the second time related data item to be formed and displayed. The timepiece can thus be arranged in particular to derive, from pulses at 1 Hz originating from the time base at the output of the frequency divider circuit, second control pulses having a frequency of 1/86.4 Hz in order to form a second time related data item to a  
25 thousandth of a day, despite the fact that the division ratio of these frequencies is not integer.

Another advantage of the present invention thus lies in the fact that only one time base is used to generate the different control pulses of the first and second time related data items and that it is consequently possible to adapt the electronic system

of a conventional timepiece so that it allows the display of a time related data item based on the decimal system.

Other features and advantages of the present invention will appear upon reading the following detailed description, made with reference to the annexed  
5 drawings given solely by way of example and in which:

- Figure 1 shows a simplified block diagram of a timepiece constituting a first embodiment of the present invention;

- Figure 2 shows a simplified block diagram of a timepiece constituting a second embodiment of the present invention;

10 - Figures 3a and 3b show plane view of timepieces according to the present invention illustrating different possibilities for the display of the time related data;

- Figure 4 shows a flow chart of the implementation of a first alternative embodiment of the generating means allowing control pulses to be supplied for the display of the time related data item based on the decimal system;

15 - Figure 5 shows a second alternative embodiment of the generating means allowing control pulses to be supplied for the display of the time related data item based on the decimal system;

- Figures 5a to 5c show examples of the application of the second alternative embodiment of generating means 14 illustrated in Figure 5;

- Figure 6 shows a third alternative embodiment of the generating means allowing the control pulses to be supplied for the display of the time related data item based on the decimal system; and

- Figure 6a shows an example of the application of the third alternative embodiment of generating means 14 illustrated in Figure 6.

Figure 1 shows, in the form of a simplified block diagram, a timepiece constituting a first embodiment of the present invention. This timepiece includes in series a time base 2, typically formed of a quartz oscillator, a frequency divider circuit 4 including N binary division stages 4.1 to 4.N and supplying first control pulses  $I_1$ , and first display means 6 controlled by first control pulses  $I_1$ . A quartz oscillator supplying pulses at a frequency of 32,768 Hz and a frequency divider circuit including N=15 binary division stages will typically be used, so as to generate first control pulses  $I_1$  having a frequency of 1 Hz. In the following description, the aforementioned numerical values will be used by way of non limiting example.

First display means 6 are controlled by first control pulses  $I_1$  and are arranged in a conventional manner so that they allow a first time related data item  $H_1$  based on the H-M-S system, to be formed and displayed.

The timepiece according to the present invention further include generating means 14 supplying second control pulses  $I_2$  whose frequency is determined by the decimal division adopted, namely for example 1/86.4 Hz in the case where a division into thousandths of a day is adopted. These generating means 14 are controlled by auxiliary control pulses  $I_L$  originating from time base 2 and supplied, in this embodiment, at the output of one of binary division stages 4.1 to 4.N of frequency divider circuit 4, this stage being indicated by the reference 4.L and being able to be chosen from among the group of binary division stages 4.1 to 4.N. It will be noted that the frequency of auxiliary control pulses  $I_L$  is equivalent to the frequency of the pulses supplied by time base 2 reduced by a factor of  $2^L$ .

Alternative embodiments of generating means 14 will be presented in more detail in the following description.

Second display means 16 are connected in series with generating means 14. These second display means 16 are controlled by the second control pulses  $I_2$  and are  
5 arranged so that they allow a second time related data item  $H_2$ , based on the decimal system to be formed and displayed.

Figure 2 shows, in the form of a simplified block diagram, a timepiece constituting a second embodiment of the present invention. This timepiece includes in series, time base 2, frequency divider circuit 4, first and second display means 6 and  
10 16, as well as generating means 14 for second control pulses  $I_2$ .

This timepiece further includes  $N^*$  additional binary division stages  $4.N+1$  to  $4.N+N^*$  connected after frequency divider circuit 4. Generating means 14 are controlled by auxiliary control pulses  $I_L$  also originating from time base 2 and supplied, in this embodiment, at the output of additional binary division stages  $4.N+1$  to  $4.N+N^*$ .  
15 It will be noted that the frequency of auxiliary control pulses  $I_L$  is equivalent, in this case, to the frequency of the pulses supplied by time base 2 reduced by a factor of  $2^{N+N^*}$ .

The embodiments illustrated in Figures 1 and 2 thus allow the display of a first time related data item  $H_1$ , based on the H-M-S system, and a second time related data item  $H_2$ , based on the decimal system. In these two embodiments, the second control pulses  $I_2$  are thus generated from auxiliary control pulses  $I_L$  originating from time base  
20 2.

It will be noted that the timepiece according to the present invention further includes correction means allowing different time related data to be adjusted. These  
25 correction means have not been described here and are not shown in Figures 1 and 2. Those skilled in the art will however know how to make these correction means so that they allow each time related data item to be adjusted in a suitable manner.

It will further be noted that the embodiments shown in Figures 1 and 2 are in no way limiting. In particular, additional display means can further be provided so as to



allow additional time related data based on the H-M-S system or the decimal system to be formed and displayed.

It will also be noted that those skilled in the art will know how to make display means 6 and 16 in a suitable manner. It will be noted in particular that these means  
5 may advantageously be made in the form of an analogue hand display controlled by electromechanical means or in the form of a digital display. By way of example, Figures 3a and 3b show plane views of timepieces according to the present invention illustrating different possibilities for the display of time related data  $H_1$  and  $H_2$ .

As is illustrated in Figure 3a, first display means 6 of first time related data item  
10  $H_1$  can be made in the form of a digital display allowing, for example, the display of time related data item  $H_1$  in accordance with a conventional "HM:MM" format. Alternatively, these first display means can for example include, as is shown in Figure 3b, first and second hands driven by electromechanical means (not shown) and allowing respectively the display of the hours and the minutes.

15 Second display means 16 of second time related data item  $H_2$  are advantageously formed, as is illustrated in Figures 3a and 3b, of a digital display including, in this example, 3 digits so as to allow the display of the second time related data item  $H_2$  in thousandths of a day. These second display means 16 may however also be made in the form of an analogue hand display driven by electromechanical  
20 means in a similar way to first display means 6 illustrated in Figure 3b.

With reference to Figures 4 to 6 various alternative embodiments of generating means 14 allowing second control pulses  $I_2$  to be supplied according to the invention will now be described.

It will be recalled that, according to the case being considered, i.e. for example  
25 a division into thousandths (86.4 seconds) or alternatively into ten-thousandths (8.64 seconds) of a day, second control pulses  $I_2$  have to be supplied at a frequency of 1/86.4 Hz or 1/8.64 Hz respectively.

It will also be recalled that in the following description one will assume by way of non limiting example that time base 2 typically supplies pulses at a frequency of  
30 32,768 Hz so that  $N=15$  binary division stages 4.1 to 4.15 allow first control pulses  $I_1$

to be supplied at a frequency of 1 Hz.

Auxiliary control pulses  $I_L$  are used, according to the present invention, to generate second control pulses  $I_2$ . The frequency of auxiliary control pulses  $I_L$  is determined by the binary division stage at the output of which they are supplied.

- 5 According to the first embodiment described in Figure 1, this frequency is thus equal to the frequency of the pulses supplied by time base 2 reduced by a factor of  $2^L$ . According to the second embodiment described in Figure 2, this frequency is equal to the frequency of the pulses supplied by time base 2 reduced by a factor  $2^{N+N'}$ .

- 10 The frequency division ratio of auxiliary control pulses  $I_L$  by the frequency of second control pulses  $I_2$  defines a numerical value corresponding to the mean number of auxiliary control pulses  $I_L$  to be counted to generate a control pulse  $I_2$ . Given that the frequency of the pulses supplied by time base 2 is typically equivalent to a binary power, the division ratio defines a non integer numerical value due to the decimal division of the day.

- 15 It will be noted that it is not possible to count a non integer number of auxiliary control pulses  $I_L$ . Consequently, within the scope of the present invention, integer numbers  $n$  and  $n+1$  are defined respectively directly less than and greater than the aforementioned division ratio. These integer numbers  $n$  and  $n+1$  thus correspond respectively to the integer numbers directly less than and greater than the mean  
20 number of auxiliary control pulses  $I_L$  to be counted to generate a control pulse  $I_2$ .

In order for second control pulses  $I_2$  to be generated at a mean frequency corresponding to the desired frequency, i.e. for example 1/86.4 Hz or 1/8.64 Hz,  $n$  and  $n+1$  auxiliary control pulses  $I_L$  are thus successively counted in accordance with a determined counting sequence.

- 25 This counting sequence is formed of a succession of counting operations of  $n$  and  $n+1$  auxiliary control pulses  $I_L$ . The division ratio defined hereinbefore determines the period as well as the number of counting operations at the end of which second control pulses  $I_2$  are generated at the desired mean frequency.

This counting sequence is further preferably formed so that the spaces generated during the counting sequence are reduced to a minimum.

By way of example, in the case where second control pulses  $I_2$  are generated at a mean frequency of 1/86.4 Hz from auxiliary control pulses  $I_L$  at 1 Hz, i.e. in the case in which generating means 14 are connected to the last binary division stage 4.N of frequency divider circuit 4 (according to the first embodiment shown in Figure 1), the frequency division ratio is equal to 86.4. Generating means 14 are thus arranged to count successively  $n=86$  and  $n+1=87$  auxiliary control pulses  $I_L$ .

The division ratio further defines that 5 control pulses  $I_2$  must be generated during one period of 432 seconds. In this case, the counting sequence, repeated 200 times over a duration of 24 hours, is thus formed of a succession of 5 counting operations. In the present case,  $n=86$  and  $n+1=87$  auxiliary control pulses  $I_L$  are respectively counted 3 and 2 times during the 432 seconds, so that the mean frequency at which second control pulses  $I_2$  are supplied is thus equal to 1/86.4 Hz.

In order for the spaces generated during the counting sequence to be reduced to a minimum, the 5 control pulses  $I_2$  are preferably generated in accordance with the following counting sequence:

86-87-86-87-86

In such case, it will be noted that the maximum time error generated during the counting sequence is thus limited to +/- 0.4 seconds, i.e. of the order of 0.5% of the period of second control pulses  $I_2$ .

Similarly, in the event that second control pulses  $I_2$  are generated at a mean frequency of 1/86.4 Hz from auxiliary control pulses  $I_L$  at 1/8 Hz, i.e. in the event that generating means 14 are connected to the output of  $N^*=3$  additional binary division stages (according to the second embodiment shown in Figure 2), the frequency division ratio is equal to 10.8. Generating means 14 are thus arranged to count successively  $n=10$  and  $n+1=11$  auxiliary control pulses  $I_L$ .

The division ratio further defines that 5 control pulses  $I_2$  must be generated during one period of 432 seconds. In this case, the counting sequence, repeated 200 times over a duration of 24 hours, is thus formed of a succession of 5 counting operations. In the present case,  $n=10$  and  $n+1=11$  auxiliary control pulses  $I_L$  are respectively counted 1 and 4 times during the 432 seconds, so that the mean frequency at which second control pulses  $I_2$  are supplied is thus equal to 1/86.4 Hz.

In order for the spaces generated during the counting sequence to be reduced to a minimum, the 5 control pulses  $I_2$  are preferably generated in accordance with the following counting sequence:

10 11-11-10-11-11

In such case, it will be noted that the maximum time error generated during the counting sequence is thus limited to  $\pm 3.2$  seconds, i.e. of the order of 4% of the period of second control pulses  $I_2$ .

15 Similarly, in the event that second control pulses  $I_2$  are generated at a mean frequency of 1/8.64 Hz from auxiliary control pulses  $I_L$  at 1 Hz, i.e. in the event that generating means 14 are connected to the output of the last binary division stage 4.N of frequency divider circuit 4 (according to the first embodiment shown in Figure 1), the frequency division ratio is equal to 8.64. Generating means 14 are thus arranged to count successively  $n=8$  and  $n+1=9$  auxiliary control pulses  $I_L$ .

20 The division ratio further defines that 25 control pulses  $I_2$  must be generated during one period of 216 seconds. In this case, the counting sequence, repeated 400 times over a duration of 24 hours, is thus formed of a succession of 25 counting operations. In the present case,  $n=8$  and  $n+1=9$  auxiliary control pulses  $I_L$  are respectively counted 9 and 16 times during the 216 seconds, so that the mean frequency at which second control pulses  $I_2$  are supplied is thus equal to 1/8.64 Hz.

In order for the spaces generated during the counting sequence to be reduced to a minimum, the 25 control pulses  $I_2$  are preferably generated in accordance with the following counting sequence:

30 9,-8,-9,-9,-8,-9,-8,-9,-9,-8,-9,-9,-8,-9,-9,-8,-9,-9,-8,-9,-9,-8,-9,-9,-8,-9

In such case, it will be noted that the maximum time error generated during the counting sequence is thus limited to +/- 0.48 seconds, i.e. of the order of 5.5% of the period of second control pulses  $I_2$ .

Generally, it will be noted that the choice of auxiliary control pulses  $I_L$  determines on the one hand the accuracy with which second control pulses  $I_2$  are generated, and on the other hand, the size of the registers/counters necessary for counting auxiliary control pulses  $I_L$ .

Various alternative embodiments of generating means 14 based on the aforementioned principle will now be described.

Figure 4 shows a flow diagram of the implementation of generating means 14 constituting a first alternative embodiment according to the present invention. According to this first variant, generating means 14 can advantageously be made in the form of an integrated circuit including a programmed microprocessor. Those skilled in the art will know, from the indications provided here, how to program the microprocessor, so as to allow it to perform the functions described.

With reference to the flow diagram illustrated in Figure 4, the counting sequence begins at the block indicated by the reference 400.

At block 402, a counting register COMPT is incremented at each auxiliary control pulse  $I_L$ . This counting register COMPT includes a sufficient number of bits to allow the counting of at least  $n+1$  auxiliary control pulses  $I_L$ . By way of example, in order to allow counting of  $n+1=87$  auxiliary control pulses  $I_L$ , this counting register COMPT includes at least 7 bits.

A first test is effected at block 404 so as to check whether the value of counting register COMPT has reached value  $n$ . Counting register COMPT is incremented at block 402 at each auxiliary control pulse  $I_L$  as long as the value thereof is less than value  $n$ , this being indicated by the affirmative output of test block 404.

When the value of counting register COMPT reaches value  $n$ , represented by the negative output of test block 404, a second test is then performed at block 406 so as to check whether the value of counting register COMPT has passed value  $n$ .

The negative output of test block 406 leads to the third test indicated at block 408. At this stage, it is checked whether, according to the counting sequence, counting register COMPT has to be stopped at value  $n$ . If necessary, a control pulse

$I_2$  is generated at block 410, i.e. after the counting of  $n$  auxiliary control pulses  $I_L$ . In the contrary case, counting register COMPT is incremented at block 402 and, following the affirmative result of the test performed at block 406, the control pulse  $I_2$  is then generated at block 410, i.e. after the counting of  $n+1$  auxiliary control pulses  $I_L$ .

5           Following the generation of control pulse  $I_2$  at block 410, counting register COMPT is initialised at block 412 and the process begins again at block 400.

          In order to perform the test indicated at block 408 it is convenient to use a table representing the counting sequence and consequently including as many entries as there are counting operations.

10           This table preferably includes binary values representing the counting operation to be performed, i.e. for example the binary value « 0 » if  $n$  auxiliary control pulses  $I_L$  have to be counted or the binary value « 1 » if  $n+1$  auxiliary control pulses  $I_L$  have to be counted. In this case, a binary word including as many bits as there are counting operations allows the table representing the counting sequence to be easily  
15   formed.

          The use of a table representing the counting sequence is not however necessary in all cases. As will be seen hereinafter with reference to different embodiment examples, certain alternatives and simplifications could be envisaged.

          It will also be mentioned that the process described hereinbefore is preferably  
20   executed in phase with the current value of the second time related data item  $H_2$  so as to assure that the counting sequence is not out of phase therewith. A register containing the value of the second time related data item  $H_2$  being displayed will preferably be used so as to determine which counting operation needs to be performed.

25           In particular, in the event that a table is used, the register containing the value of the second time related data item  $H_2$  being displayed allows an indexation value to be defined for the various table entries by a simple modulo calculation. Modulo of course means the arithmetical calculation giving the remainder of a division by a determined number.

30           In the case already discussed hereinbefore in which second control pulses  $I_2$  are generated at a mean frequency of  $1/86.4$  Hz from auxiliary control pulses  $I_L$  at

1 Hz, it will be recalled that the counting sequence is preferably determined so that 5 control pulses  $I_2$  are generated in accordance with the following counting sequence:

86-87-86-87-86

This counting sequence can thus be represented by a table with 5 entries,  
5 preferably made using the following 5 bit word:

« 0 1 0 1 0 »

With reference once again to Figure 4, the test which is performed at block 408 is thus carried out by seeking the corresponding value in the table.

Preferably, a register containing the value of the second time related data item  
10  $H_2$  being displayed will be used, or at least the value (0 to 9) of the thousandths of a day displayed. A modulo-5 operation on the value of this register thus allows an indexation value (0 to 4) to be obtained from the table.

In this example, one alternative to using the table consists in directly using the result of the modulo-5 operation on the register containing the value of the  
15 thousandths of a day displayed. It will be noted that, in this example, the counting operations by  $n=86$  and  $n+1=87$  are alternated. Consequently, it is possible to determine whether  $n$  auxiliary control pulses  $I_L$  have to be counted checking whether the result of the modulo-5 operation is an even number. Respectively, it is determined whether  $n+1$  auxiliary control pulses  $I_L$  have to be counted checking whether the result  
20 is an odd number.

In the case already discussed hereinbefore in which second control pulses  $I_2$  are generated at a mean frequency of 1/86.4 Hz from auxiliary control pulses  $I_L$  at 1/8 Hz, it will be recalled that the counting sequence is preferably determined so that 5 control pulses  $I_2$  are generated in accordance with the following counting sequence:

25 11-11-10-11-11

This counting sequence can thus be represented by a table with 5 entries, preferably made using the following 5 bit word:

« 1 1 0 1 1 »

In this case also, a register containing the value of the thousandths of a day  
30 displayed will be used, in order to obtain from the table via a modulo-5 operation an indexation value (0 to 4).

In the case already discussed hereinbefore in which second control pulses  $I_2$  are generated at a mean frequency of  $1/8.64$  Hz from auxiliary control pulses  $I_L$  at 1 Hz, it will be recalled that the counting sequence is preferably determined so that 25 control pulses  $I_2$  are generated in accordance with the following counting sequence:

5                   9-8-9-9-8-9 -8-9-9 -8-9-9 -8-9-9 -8-9-8 -9-9-8-9

This counting sequence can thus be represented by a table with 25 entries, preferably made using the following 25 bit word:

« 1 0 1 1 0 1 0 1 1 0 1 1 0 1 1 0 1 0 1 1 0 1 »

10           With reference once again to Figure 4, the test which is performed at block 408 is thus carried out by seeking the corresponding value in the table.

Preferably, a register containing at least the value (0 to 99) of the thousandths and ten-thousandths of a day displayed will be used. A modulo-25 operation on the value of this register thus allows an indexation value (0 to 24) to be obtained from the table.

15           Figure 5 illustrates a second alternative embodiment of generating means 14 allowing second control pulses  $I_2$  to be supplied.

As is shown in Figure 5, these generating means 14 include a primary counter 141 arranged to count  $n$  auxiliary control pulses  $I_L$ , and inhibition means 142 of primary counter 141. Inhibition means 142 are controlled by auxiliary control pulses  $I_L$  and are situated upstream of primary counter 141 so as to periodically inhibit a  
20           determined number of auxiliary control pulses  $I_L$  at the input thereof. Second control pulses  $I_2$  are supplied at the output of primary counter 141.

Inhibition means 142 preferably include a secondary counter 144 arranged to count  $m$  auxiliary control pulses  $I_L$ , a logic detection circuit 146 coupled to different  
25           stages of secondary counter 144 so as to detect  $k$  intermediate states thereof (selected from among states 0 to  $m-1$ ) during which auxiliary control pulses  $I_L$  are inhibited, and a logic AND gate, indicated by the reference 148, including 2 inputs, one being inverted and connected to the output of logic detection circuit 146 and the other receiving auxiliary control pulses  $I_L$ .



Inhibition means 142 thus allow  $k$  auxiliary control pulses  $I_L$  to be inhibited periodically upstream of primary counter 141, i.e. during a period in which  $m$  pulses  $I_L$  are supplied.

When one of the  $k$  intermediate states is detected by logic detection circuit 146, the latter thus sends an inhibition signal blocking the output of the logic AND gate for the duration of one auxiliary control pulse  $I_L$  so that primary counter 141 does not « see » this pulses and does not take it into account.

The  $k$  intermediate states will preferably be chosen so that they are equidistant from each other, in order to minimise the spaces generated.

Figure 5a illustrates a first example of the second alternative embodiment shown in Figure 5, applied to the case in which second control pulses  $I_2$  are generated at a mean frequency of 1/86.4 Hz from auxiliary control pulses  $I_L$  having a frequency of 1 Hz, i.e. in the case in which generating means 14 are connected to the output of the last binary division stage 4.N of frequency divider circuit 4 (in accordance with the first embodiment shown in Figure 1).

It will be recalled that the division ratio between the frequency of auxiliary control pulses  $I_L$  and the frequency of the second control pulses is equal in this case to 86.4. Primary counter 141 is thus formed of a counter by  $n=86$ . It follows that 2 auxiliary control pulses  $I_L$  must be inhibited during the period (432 seconds) in which 432 auxiliary control pulses  $I_L$  are supplied, i.e., by simplification, 1 pulse per 216. For this purpose, secondary counter 144 is formed of a counter by  $m=216$  and logic detection circuit 146 is arranged to detect  $k=1$  intermediate states (selected from among states 0 to 215) of secondary counter 144 during which one auxiliary control pulse  $I_L$  is inhibited upstream of primary counter 141. During one period of 432 seconds, primary counter 141 only « sees » 430 pulses. 5 control pulses  $I_2$  are thus supplied at the output of primary counter 141 during one period of 432 seconds, i.e. at the mean frequency of 1/86.4 Hz.

The counter by 86 can easily be made by means of a 7 bit binary counter arranged to be initialised after 86 pulses. Likewise, the counter by 216 requires an

8 bit counter arranged to be initialised after 216 bits.

Figure 5b illustrates a second example of the second alternative embodiment shown in Figure 5 applied to the case in which second control pulses  $I_2$  are generated at a mean frequency of 1/86.4 Hz from auxiliary control pulses  $I_L$  having a frequency of 1/8 Hz, i.e. in the case in which generating means 14 are connected to the output of  $N^*=3$  additional binary division stages (in accordance with the second embodiment shown in Figure 2).

It will be recalled that the division ratio between the frequency of auxiliary control pulses  $I_L$  and the frequency of the second control pulses is equal in this case to 10.8. Primary counter 141 is thus formed of a counter by  $n=10$ . It follows that 4 auxiliary control pulses  $I_L$  must be inhibited during the period (432 seconds) in which 54 auxiliary control pulses  $I_L$  are supplied, i.e., by simplification, 2 pulses per 27. For this purpose, secondary counter 144 is formed of a counter by  $m=27$  and logic detection circuit 146 is arranged to detect  $k=2$  intermediate states (selected preferably equidistant from among states 0 to 26) of secondary counter 144 during which one auxiliary control pulse  $I_L$  is inhibited upstream of primary counter 141. During one period of 432 seconds, primary counter 141 only «sees» 50 pulses. 5 control pulses  $I_2$  are thus supplied at the output of primary counter 141 during one period of 432 seconds, i.e. at the mean frequency of 1/86.4 Hz.

In this example the counters by 10 and by 27 thus require 4 and 5 bit counters respectively.

Figure 5c illustrates a third example of the second alternative embodiment shown in Figure 5 applied to the case in which second control pulses  $I_2$  are generated at a mean frequency of 1/8.64 Hz, i.e. 25 pulses during one period of 216 seconds, from auxiliary control pulses  $I_L$  having a frequency of 1 Hz, i.e. in the case in which generating means 14 are connected to the output of the last binary division stage 4.N of frequency divider circuit 4 (in accordance with the first embodiment shown in Figure 1).

It will be recalled that the division ratio between the frequency of auxiliary control pulses  $I_L$  and the frequency of the second control pulses is equal in this case to 8.64. Primary counter 141 is thus formed of a counter by  $n=8$ . It follows that 16 auxiliary control pulses  $I_L$  must be inhibited during the period (216 seconds) in which 216 auxiliary control pulses  $I_L$  are supplied, i.e., by simplification, 2 pulses per 27. For this purpose, secondary counter 144 is formed of a counter by  $m=27$  and logic detection circuit 146 is arranged to detect  $k=2$  intermediate states (selected preferably equidistant from among states 0 to 26) of secondary counter 144 during which one auxiliary control pulse  $I_L$  is inhibited upstream of primary counter 141. During one period of 216 seconds, primary counter 141 only «sees » 200 pulses. 25 control pulses  $I_2$  are thus supplied at the output of primary counter 141 during one period of 216 seconds, i.e. at the mean frequency of  $1/8.64$  Hz.

In this example the counters by 8 and by 27 thus require 3 bit and 5 bit counters respectively.

It is to be noted that numerous examples of the second alternative embodiment, which cannot all be shown here, can also be achieved. It will be noted that the frequency of auxiliary control pulses  $I_L$  defines the accuracy with which second control pulses  $I_2$  are supplied. Indeed, the higher the frequency of auxiliary control pulses  $I_L$ , the greater the accuracy with which second control pulses  $I_2$  are supplied. However, it will be noted that this involves on the other hand thus use of counters including a significant number of stages.

Figure 6 illustrates a third alternative embodiment of generating means 14 allowing second control pulses  $I_2$  to be supplied.

As is shown in Figure 6, these generating means 14 include a primary counter 241 arranged to count  $n+1$  auxiliary control pulses  $I_L$ , and initialisation means 242 coupled to primary counter 241. Second control pulses  $I_2$  are supplied at the output of primary counter 241 and are used to control initialisation means 242 so as to initialise periodically primary counter 241 with a value  $k$  corresponding to a complementary number of auxiliary control pulses  $I_L$ .

Initialisation means 242 preferably include a secondary counter 244 arranged for counting  $m$  second control pulses  $I_2$  and an initialisation circuit 246 coupled to the different stages of primary counter 241 so as to periodically initialise the latter, i.e. after  $m$  pulses  $I_2$  have been supplied, with a value  $k$  corresponding to the

- 5 complementary number of auxiliary control pulses  $I_L$  necessary for primary counter 241 to supply second control pulses  $I_2$  at the appropriate mean frequency.

Thus, after the generation of  $m$  control pulses  $I_2$ , primary counter 241 is periodically initialised with a value  $k$  so as to compensate for the missing auxiliary control pulses  $I_L$ .

- 10 Figure 6a illustrates an example of the third alternative embodiment shown in Figure 6 applied to the case in which second control pulses  $I_2$  are generated at a mean frequency of 1/86.4 Hz from auxiliary control pulses  $I_L$  having a frequency of 1 Hz, i.e. in the case in which generating means 14 are connected to the output of the last binary division stage 4.N (4.15) of frequency divider circuit 4 (in accordance with
- 15 the first embodiment shown in Figure 1).

It will be recalled that the division ratio between the frequency of auxiliary control pulses  $I_L$  and the frequency of the second control pulses is equal in this case to 86.4.

- Primary counter 241 is thus formed of a counter by  $n+1=87$ . It follows that the
- 20 latter has to be initialised every 432 seconds with a start value  $k=3$  corresponding to the complementary number of auxiliary control pulses  $I_L$ . For this purpose, secondary counter 244 is formed of a counter by  $m=5$  and initialisation circuit 246 is arranged to inject the value  $k=3$  into the first two stages of primary counter 241 as the start value.

- During one period of 432 seconds, primary counter 241 thus counts 435
- 25 pulses. 5 control pulses  $I_2$  are thus supplied at the output of primary counter 241 during one period of 432 seconds, i.e. at the mean frequency of 1/86.4 Hz.

In this example, the counters by 87 and by 5 require 7 and 3 bit counters respectively.

- It will be noted finally that several modifications and/or improvements can be
- 30 made to the timepiece according to the present invention without departing from the scope thereof. It will thus be recalled in particular that additional display means may

be provided so as to allow additional time related data based on the H-M-S or decimal system to be formed and displayed.

## CLAIMS

1. Electronic timepiece allowing the display of at least a first ( $H_1$ ) and a second ( $H_2$ ) time related data item, said first time related data item ( $H_1$ ) being based on the Hour-Minute-Second system (H-M-S), this timepiece including a time base (2) supplying pulses to a frequency divider circuit (4) including N binary division stages (4.1 to 4.N) and supplying first control pulses ( $I_1$ ) allowing said first time related data item ( $H_1$ ) to be formed and displayed, this timepiece further including generating means (14) arranged to supply, from auxiliary control pulses ( $I_L$ ) originating from said time base (2), second control pulses ( $I_2$ ) allowing said second time related data item ( $H_2$ ) to be formed and displayed,
- 10 this timepiece being characterised in that said second time related data item ( $H_2$ ) is based on a decimal system in which the time is divided at least into thousandths of a day and in that said second time related data item ( $H_2$ ) is displayed with three digits so that it cannot be confused with said first time related data item ( $H_1$ ),
- 15 said generating means (14) being arranged to count successively the auxiliary control pulses ( $I_L$ ) in accordance with a counting sequence formed of counting operations of n and n+1 auxiliary control pulses ( $I_L$ ) succeeding each other in accordance with a determined order so that said generating means (14) supply the second control pulses ( $I_2$ ) at a mean frequency allowing said second time related data
- 20 item ( $H_2$ ) based on the decimal system to be formed, n being an integer number directly less than the division ratio of the frequency of said auxiliary control pulses ( $I_L$ ) by the frequency of said second control pulses ( $I_2$ ).
2. Electronic timepiece according to claim 1, characterised in that said counting operations of n and n+1 auxiliary control pulses ( $I_L$ ) follow each other in
- 25 accordance with an order determined so that the second control pulses ( $I_2$ ) are supplied with minimum time error.
3. Electronic timepiece according to claim 1 or 2, characterised in that said counting sequence is comprised in a table including as many entries as there are counting operations.
- 30 4. Electronic timepiece according to claim 3, characterised in that said table is formed of a binary word in which the binary value « 0 » indicates that n auxiliary

control pulses ( $I_L$ ) must be counted and the binary value « 1 » indicates that  $n+1$  auxiliary control pulses ( $I_L$ ) must be counted.

- 5      5. Electronic timepiece according to claim 3 or 4, characterised in that the entries of said table are indexed by means of a register containing a value of said second time related data item ( $H_2$ ).

6. Electronic timepiece according to claim 1 or 2, characterised in that said counting operations of  $n$  or  $n+1$  auxiliary control pulses ( $I_L$ ) are determined by means of a register containing a value of said second time related data item ( $H_2$ ).

- 10      7. Electronic timepiece allowing the display of at least a first ( $H_1$ ) and a second ( $H_2$ ) time related data item, said first time related data item ( $H_1$ ) being based on the Hour-Minute-Second system (H-M-S), this timepiece including a time base (2) supplying pulses to a frequency divider circuit (4) including  $N$  binary division stages (4.1 to 4. $N$ ) and supplying first control pulses ( $I_1$ ) allowing said first time related data item ( $H_1$ ) to be formed and displayed, this timepiece further including generating  
15      means (14) arranged to supply, from auxiliary control pulses ( $I_L$ ) originating from said time base (2), second control pulses ( $I_2$ ) allowing said second time related data item ( $H_2$ ) to be formed and displayed,

- 20      this timepiece being characterised in that said second time related data item ( $H_2$ ) is based on a decimal system in which the time is divided at least into thousandths of a day and in that said second time related data item ( $H_2$ ) is displayed with three digits so that it cannot be confused with said first time related data item ( $H_1$ ),

- 25      said generating means (14) including a primary counter (141) arranged for counting  $n$  auxiliary control pulses ( $I_L$ ), and inhibition means (142) for said primary counter (141) arranged for periodically inhibiting  $K$  auxiliary control pulses ( $I_L$ ) upstream of said primary counter (141), so that the latter supplies the second control pulses ( $I_2$ ) at a mean frequency allowing said second time related data item ( $H_2$ ) based on the decimal system to be formed,  $n$  being an integer number directly less than the division ratio of the frequency of said auxiliary control pulses ( $I_L$ ) by the  
30      frequency of said second control pulses ( $I_2$ ).

8. Electronic timepiece according to claim 7, characterised in that said inhibition means (142) include a secondary counter (144) arranged for counting  $m$  auxiliary control pulses ( $I_L$ ), a logic detection circuit (146) coupled to said secondary

counter (144) so as to detect k intermediate states thereof, and an AND logic gate (148) including two inputs, one being inverted and connected to an output of said logic detection circuit (146) and the other receiving said auxiliary control pulses ( $I_L$ ), said logic detection circuit (146) sending an inhibition signal blocking the AND logic gate (148) when one of the k intermediate states is detected, so that one auxiliary control pulse ( $I_L$ ) is inhibited upstream of said primary counter (141).

9. Electronic timepiece according to claim 8, characterised in that said k intermediate states are selected so as to be equidistant from each other.

10. Electronic timepiece allowing the display of at least a first ( $H_1$ ) and a second ( $H_2$ ) time related data item, said first time related data item ( $H_1$ ) being based on the Hour-Minute-Second system (H-M-S), this timepiece including a time base (2) supplying pulses to a frequency divider circuit (4) including N binary division stages (4.1 to 4.N) and supplying first control pulses ( $I_1$ ) allowing said first time related data item ( $H_1$ ) to be formed and displayed, this timepiece further including generating means (14) arranged to supply, from auxiliary control pulses ( $I_L$ ) originating from said time base (2), second control pulses ( $I_2$ ) allowing said second time related data item ( $H_2$ ) to be formed and displayed,

this timepiece being characterised in that said second time related data item ( $H_2$ ) is based on a decimal system in which the time is divided at least into thousandths of a day and in that said second time related data item ( $H_2$ ) is displayed with three digits so that it cannot be confused with said first time related data item ( $H_1$ ),

said generating means (14) including a primary counter (241) arranged for counting n+1 auxiliary control pulses ( $I_L$ ), and initialisation means (242) coupled to said primary counter (241) and arranged for periodically initialising said primary counter (241) with a value k corresponding to a complementary number of auxiliary control pulses ( $I_L$ ) so that said primary counter (241) supplies the second control pulses ( $I_2$ ) at a mean frequency allowing said second time related data item ( $H_2$ ) based on the decimal system to be formed, n+1 being an integer number directly greater than the division ratio of the frequency of said auxiliary control pulses ( $I_L$ ) by the frequency of said second control pulses ( $I_2$ ).

11. Electronic timepiece according to claim 10, characterised in that said initialisation means (242) include a secondary counter (244) arranged for counting m



second control pulses ( $I_2$ ) and an initialisation circuit (246) coupled to said primary counter (241), said secondary counter (244) providing a signal to said initialisation circuit (244) every  $m$  second control pulses ( $I_2$ ) so that said primary counter (241) is initialised with a value  $k$ .

- 5            12. Electronic timepiece according to any of claims 1 to 11, characterised in that said auxiliary control pulses ( $I_L$ ) are supplied at an output of one (4.L) of the binary division stages (4.1 to 4.N) of said frequency divider circuit (4).

13. Electronic timepiece according to any of claims 1 to 11, characterised in that said auxiliary control pulses ( $I_L$ ) are supplied at an output of  $N^*$  additional binary  
10 division stages (4.N+1 to 4.N+N\*) connected after said frequency divider circuit (4) upstream of said generating means (14).

14. Electronic timepiece according to any of claims 1 to 11, characterised in that said generating means (14) supply said second control pulses ( $I_2$ ) at a mean frequency of 1/8.64 Hz.

- 15           15. Electronic timepiece according to any of claims 1 to 11, characterised in that said generating means (14) supply said second control pulses ( $I_2$ ) at a mean frequency of 1/86.4 Hz.

ABSTRACT

ELECTRONIC TIMEPIECE INCLUDING A TIME  
RELATED DATA ITEM BASED ON A DECIMAL SYSTEM

The present invention relates to an electronic timepiece allowing the display of at least one first time related data item ( $H_1$ ) conventionally based on the Hour-Minute-Second system, and at least one second time related data item ( $H_2$ ) based on a decimal system in which the time is divided at least into thousandths of a day. For this purpose the timepiece according to the present invention includes generating means (14) which, from auxiliary control pulses ( $I_L$ ) originating from the time base (2), allow second control pulses ( $I_2$ ) to be supplied allowing said second time related data item ( $H_2$ ) to be formed and displayed.

10 Figures 1 & 2

Fig. 1

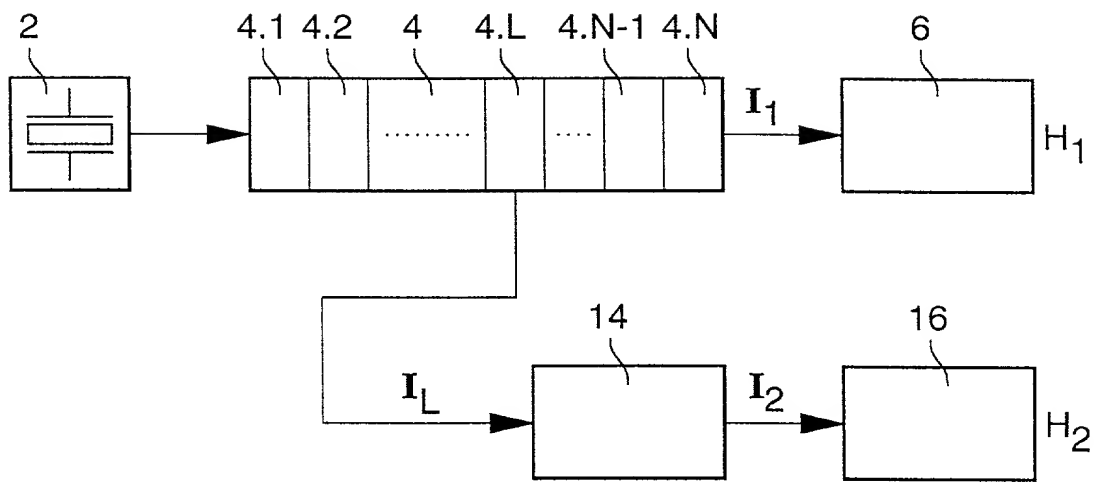


Fig. 2

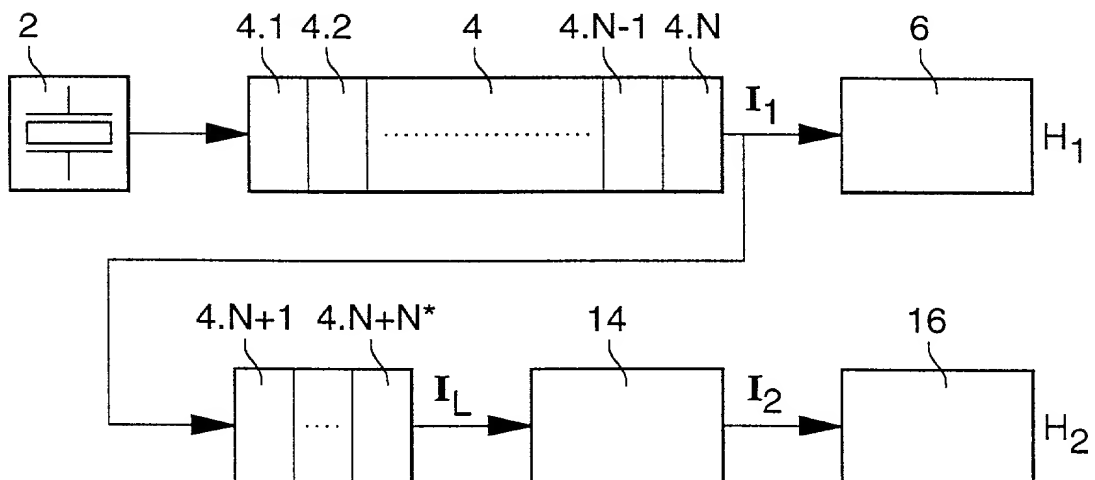


Fig. 3a

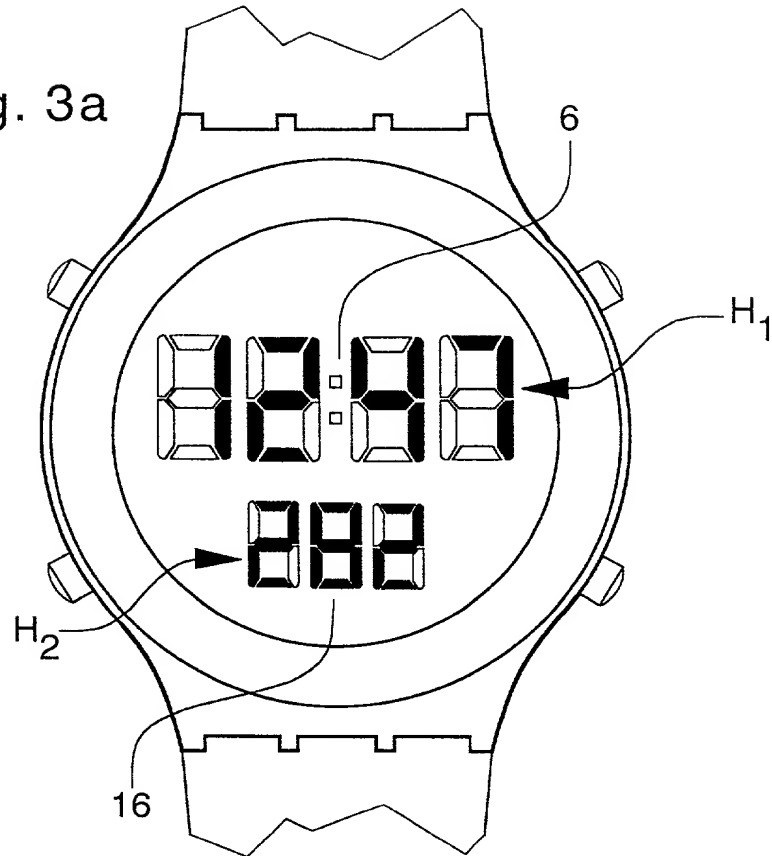


Fig. 3b

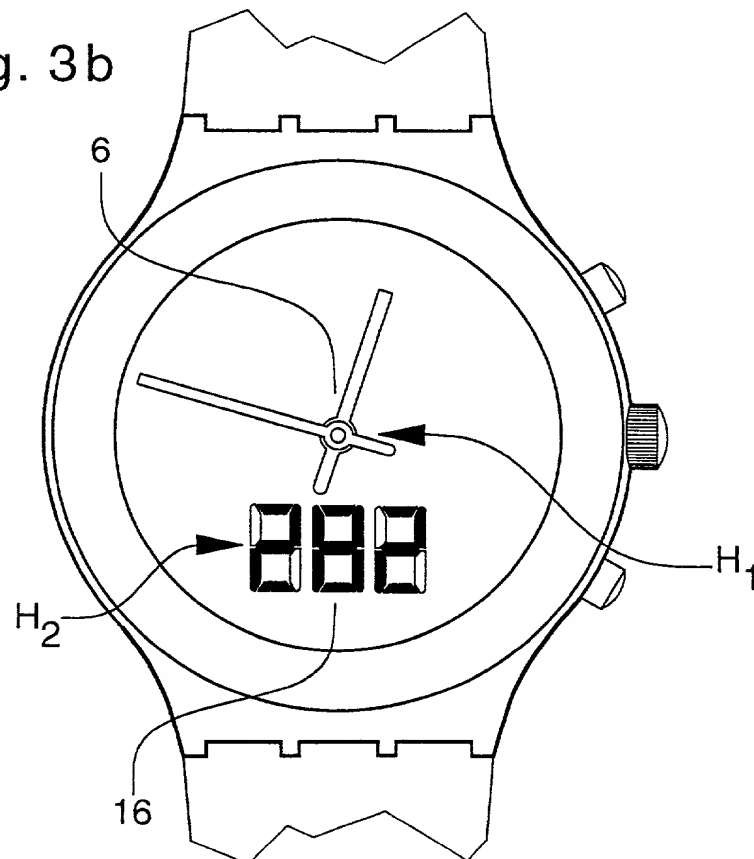


Fig. 4

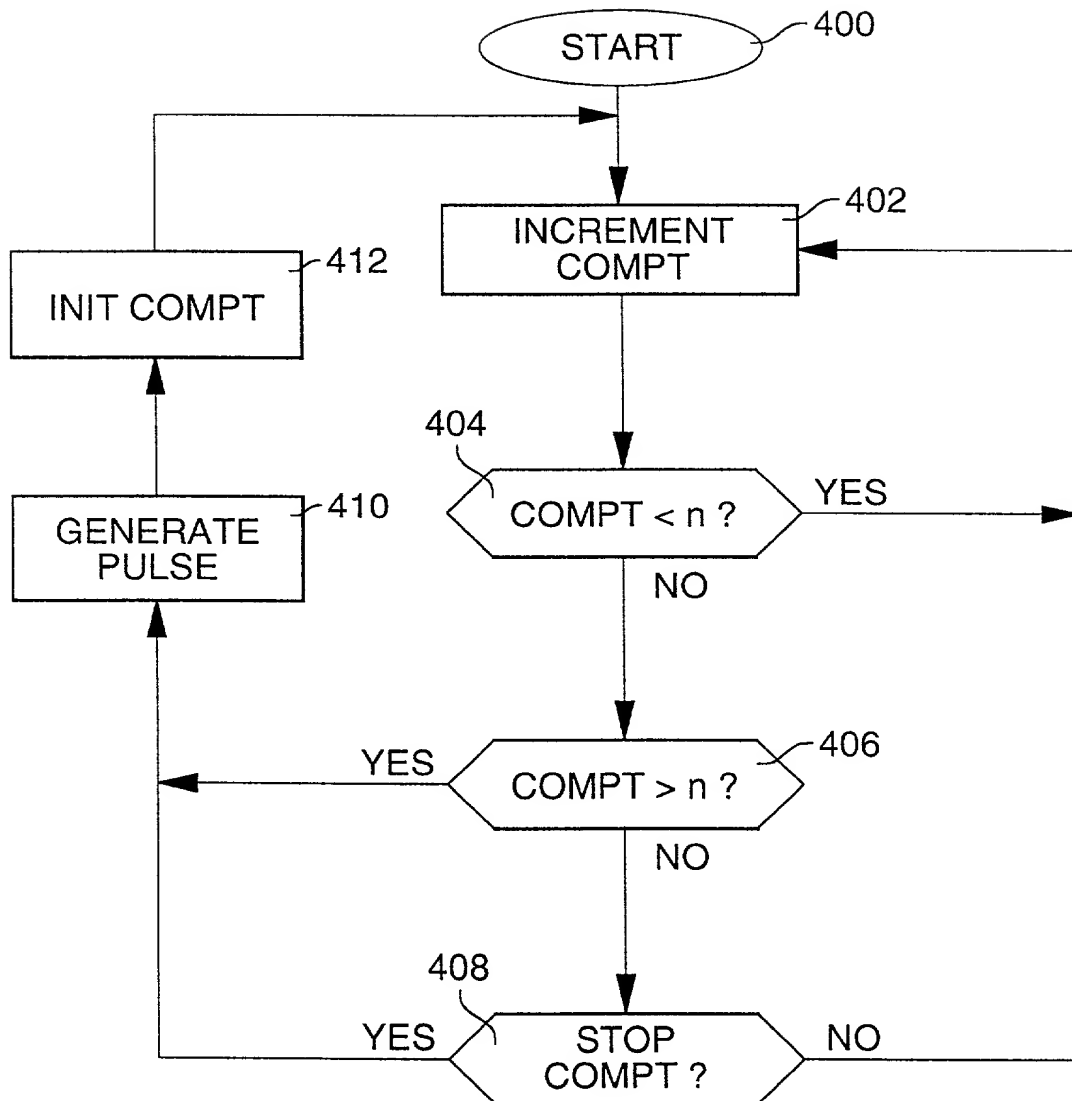


Fig. 5

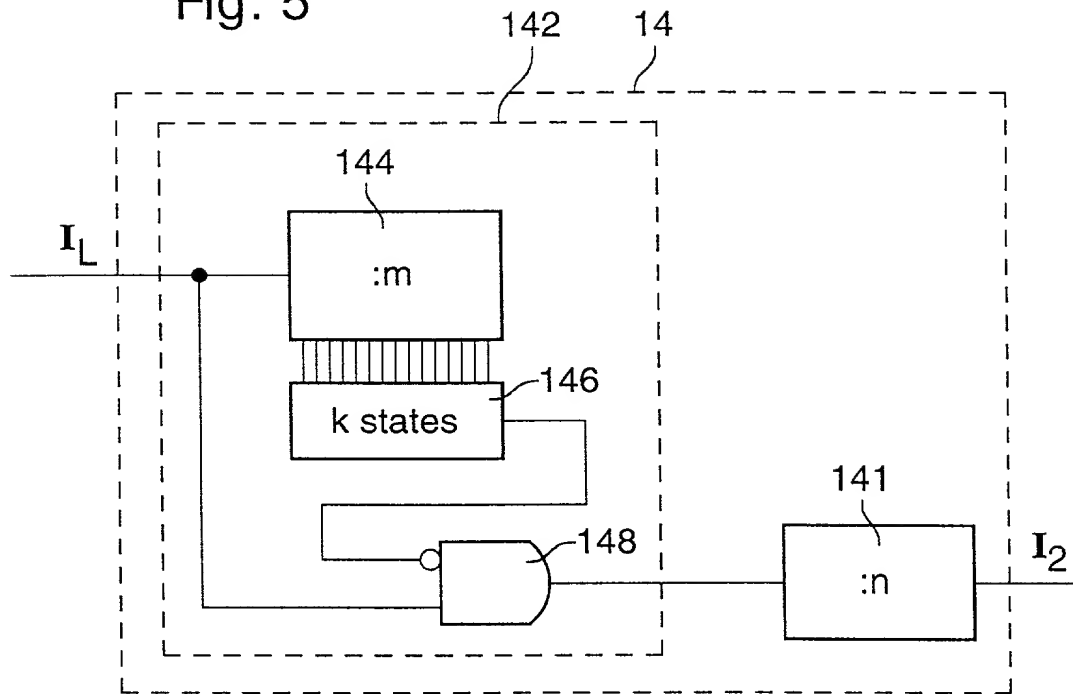


Fig. 5a

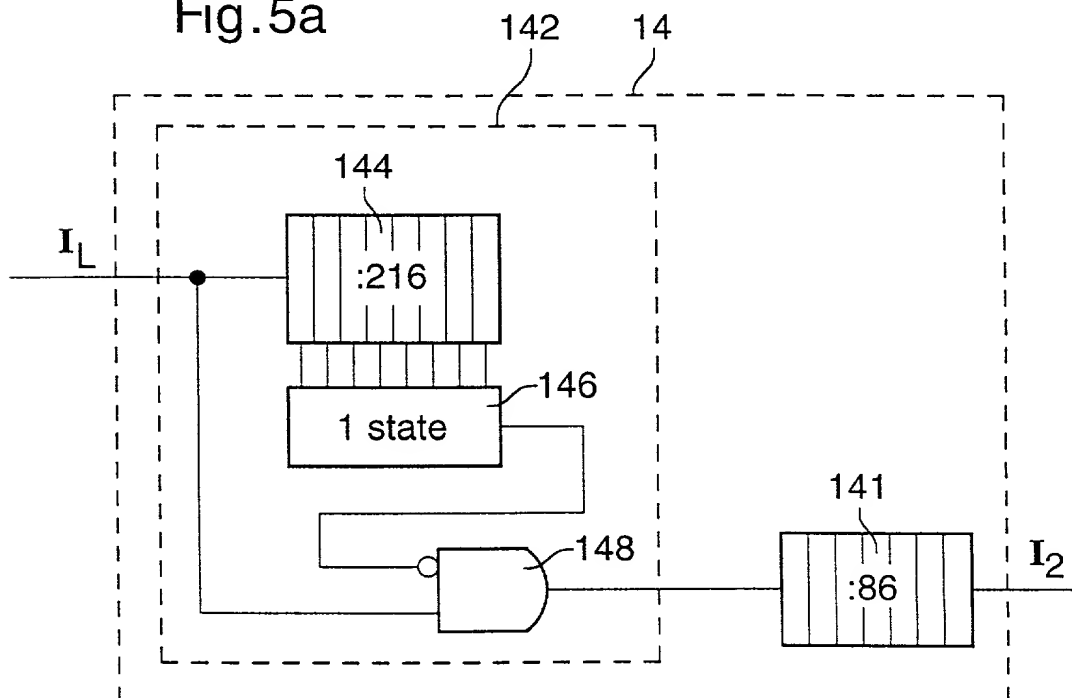


Fig. 5b

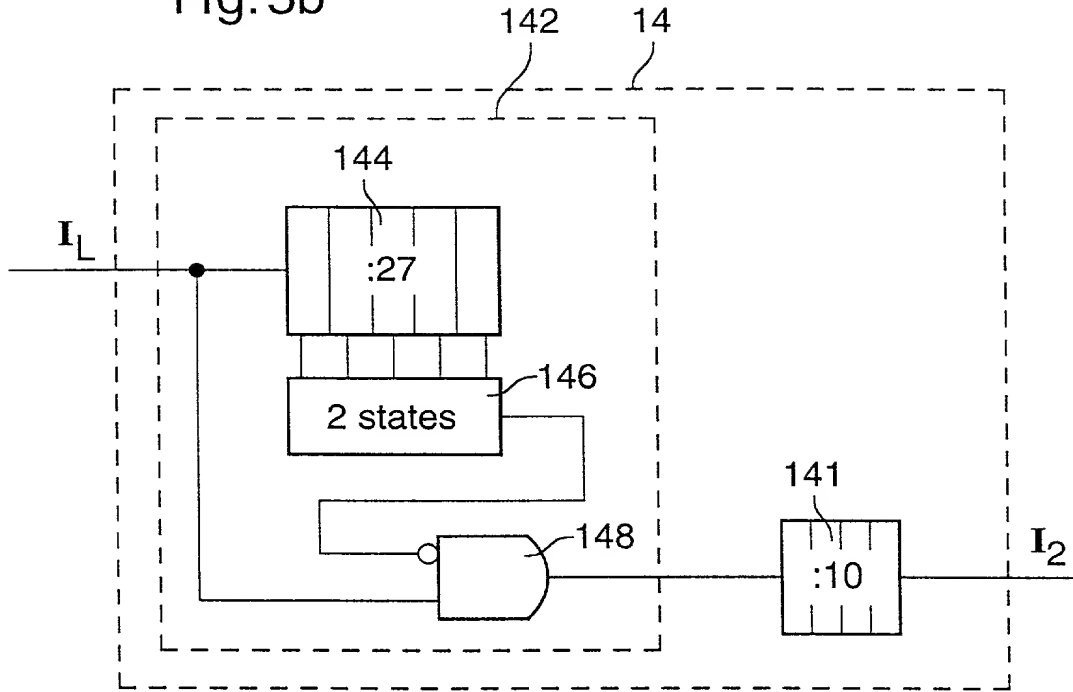


Fig. 5c

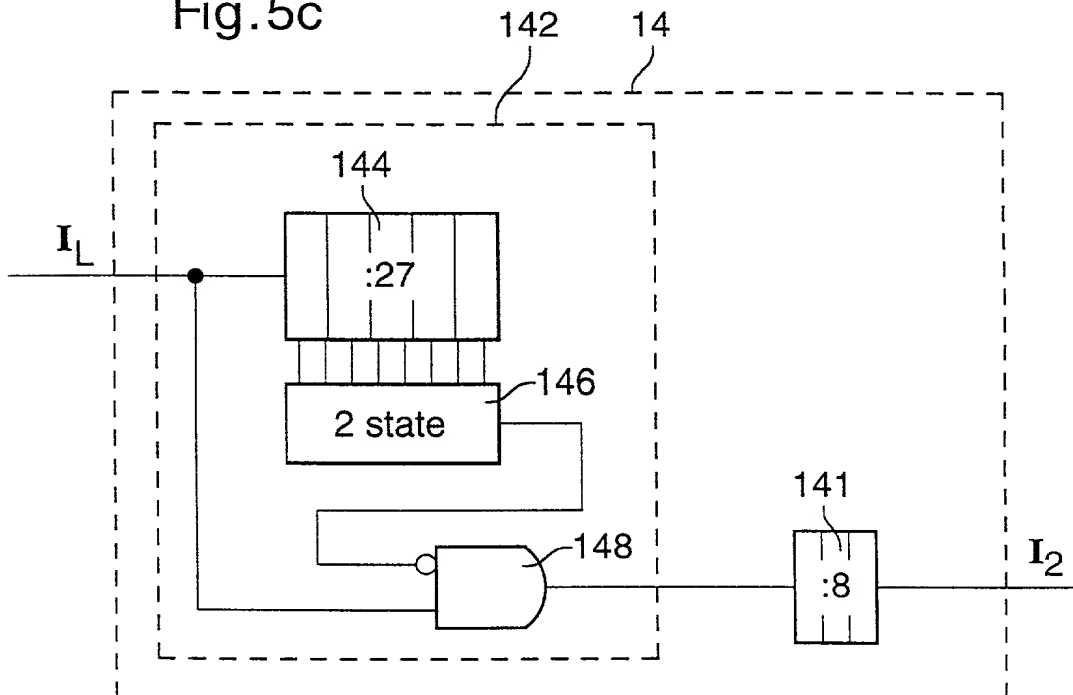


Fig. 6


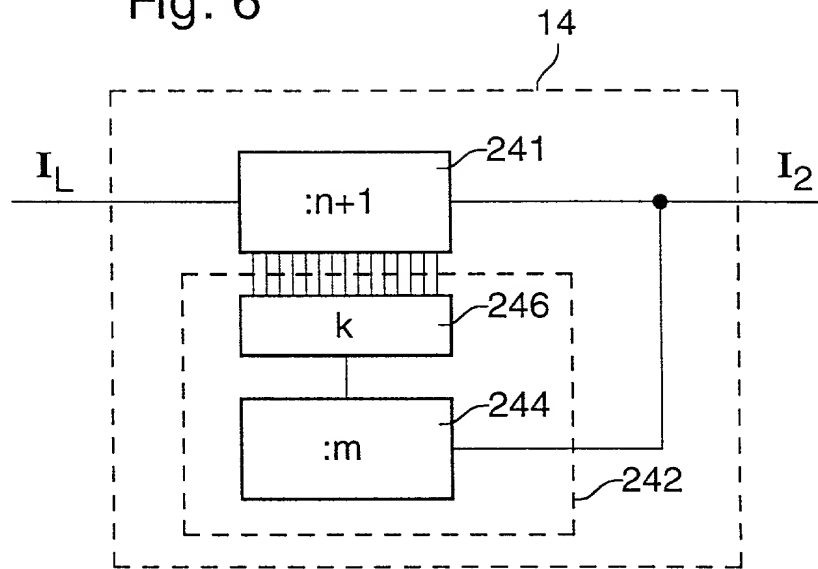


Fig. 6a



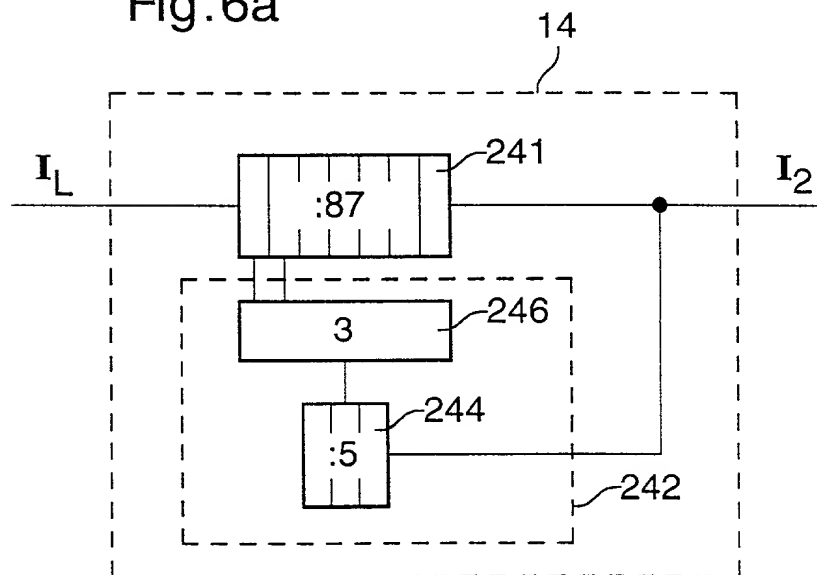

Attorney Docket: \_\_\_\_\_

**DECLARATION FOR UNITED STATES PATENT APPLICATION**  
For Use With Both PCT and Non-PCT Applications

As a below named inventor, I declare that: My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled, (1) ELECTRONIC TIMEPIECE INCLUDING A TIME RELATED DATA ITEM BASED ON A DECIMAL SYSTEM, the

specification of which is attached hereto unless the following box is checked: (2) ☒ was filed on (3) August 24, (4) as U. S. 1999 Appl. SN or PCT International Appl. No. PCT/CH99/00387 and was amended on (5) \_\_\_\_\_ (if applicable).

I state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56. I claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

NUMBER	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED
(6) <u>1764/98</u>	<u>Switzerland</u>	<u>28 August 1998</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

I claim the benefit under 35 USC 120 or 119(e) of the United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Appln. S.N.	Filing Date	Status
(7) _____	_____	<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
_____	_____	<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned

I appoint B. Franklin Griffin, Jr., Reg. No. 19,334; F. Prince Butler, Reg. No. 25,666; Fred S. Whisenhunt, Reg. No. 24,378; Joerg-Uwe Szipl, Reg. No. 31,799; Richard J. Gallagher, Reg. No. 28,781; individually and jointly my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and with the resulting patent, whose address is Griffin, Butler, Whisenhunt & Szipl, LLP, 2300 Ninth Street South, Suite PH-1, Arlington, Virginia 22204-2396, (CUSTOMER NO. 113), Telephone No. (703) 979-5700, (703) 979-7429 (FAX).

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(8) Full name of sole or first inventor Jacques MüllerInventor's signature Jacques Müller Date 7.12.2000Residence Reconvilier / Switzerland / CHX Citizenship SWISSPost Office Address Les Oeuchettes 18, CH-2732 Reconvilier(8) Full name of joint inventor Pascal DerivazInventor's signature Pascal Derivaz Date 6.12.2000Residence Le Bouveret / Switzerland / CHX Citizenship SWISSPost Office Address Chemin du Culat 15, CH-1897 Le Bouveret

- (1) Insert title of invention.
- (2) Check block for PCT application or U. S. application already on file, and complete items (3),(4) and (5). If PCT national phase entry application, insert international PCT application filing date, Serial No., and date of any Article 19 amendments.
- (6) Complete for foreign and U.S. provisional application priority documents; add additional page if needed.
- (7) Complete for earlier U.S. provisional and non-provisional parent applications; add additional page if needed.
- (8) Complete ALL blanks. Attach second page for further joint inventors.

**CAUTION: THIS FORM MAY BE USED ONLY IF ALL INVENTORS READ AND UNDERSTAND ENGLISH.**

300 (8) Full name of joint inventor Roger Marquis  
 Inventor's signature *Roger Marquis* Date 24.11.2000  
 Residence Courchapoix/Switzerland CITX Citizenship Swiss  
(City and State or Country)  
 Post Office Address Le Vevie, CH-2825 Courchapoix

(8) Full name of joint inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of sole or first inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of joint inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of joint inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of sole or first inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of joint inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of sole or first inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of joint inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_

(8) Full name of sole or first inventor \_\_\_\_\_  
 Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Post Office Address \_\_\_\_\_